


RL-35 Ring Clutch

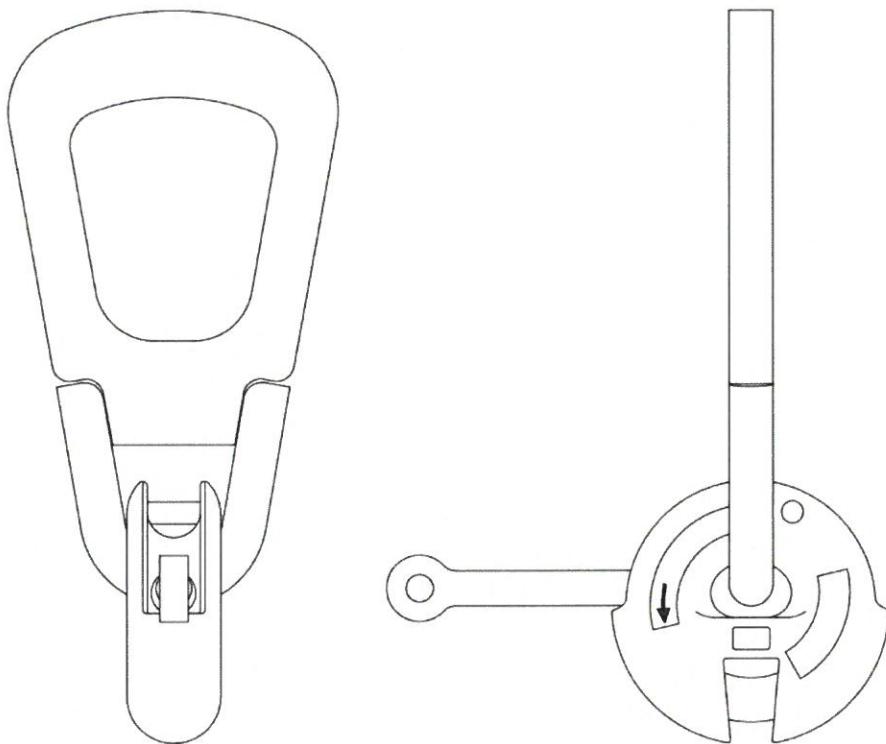

RL-35 RAPID LIFT RING CLUTCH DATA

| Ring Clutch Systems | Clutch I.D. | Item Number | A | B | C | D | E | F | Weight Per Piece (lbs) | Clutch Capacity (ton) |
|----------------------|-------------|-------------|----------|----------|----------|---------|---------|----------|------------------------|-----------------------|
| 2T/2.5T | 2.5T | 79001 | 10 7/16" | 1 1/16" | 3 1/8" | 2 3/4" | 2 1/4" | 3 5/8" | 3.65 | 2.5 |
| 4T/5T ¹ | 5T | 79002 | 13" | 1 7/16" | 4 1/8" | 3 3/16" | 2 9/16" | 4 1/2" | 8.65 | 5 |
| 8T/10T ^{**} | 10T | 79003 | 16 3/4" | 2" | 5 15/16" | 4 9/16" | 3 9/16" | 5 13/16" | 19.87 | 10 |
| 22T/26T ² | 26T | 79170 | 23 7/8" | 2 13/16" | 8 1/4" | 7 1/4" | 4 3/4" | 8 13/16" | 55.0 | 22 |

- 1) Super Lift II Ring Clutch may be used, if a longer handle is required.
- 2) Available on special order or limited to quantity on hand. Special orders take 8 to 10 weeks.
- ** May be used with DTA (Double Tee Anchor), page 45.
- 3) Clutch capacities are rated at a 5:1 safety factor, and apply only to clutches manufactured after 1/1/2000.

The RL-35 Ring Clutch is an assembly consisting of a main clutch body, a curved bolt/handle and bail. The design of the ring clutch allows a full 360° rotation of the bail around the main body. The installation of the unit is quick and easy; simply rotate the curved bolt/handle to the open position, drop the main body into the anchor recess and rotate the bolt/handle to the closed position.

